Beiblatt zur Bedienungsanleitung

Für künftige Verwendung aufbewahren

Gerätesteckdose mit Schaltzustandsanzeige Typ 1-1-84-652-010 (230V) Typ 1-1-84-652-011 (24V)

D

Anschluss und Inbetriebnahme sind nach dieser Bedienungsanleitung und nur von autorisiertem Fachpersonal vorzunehmen. Die geltenden Sicherheitsbestimmungen, Verwendungszweck und technischen Daten sind unbedingt einzuhalten.

Robert-Scheuffele GmbH&Co. KG
Keplerstraße 12-14
D-74321 Bietigheim-Bissingen
Telefon (07142) 597-0
Telefax (07142) 597-19
www.suco.de
E-Mail: info@suco.de

DIN EN 175301 – 803 – A
(DIN 43650 – A)

Insert for operating instructions

Please keep carefully for future use

connector with lamp indication Type 1-1-84-652-010 (230V) Type 1-1-84-652-011 (24V)

GB

Connection and commissioning must be carried out in accordance with these operating Instructions and by authorized, qualified personnel only. The valid safety regulations, intended use und technical data must be observed.

Robert-Scheuffele GmbH & Co. KG
Keplerstraße 12-14
D-74321 Bietigheim-Bissingen
Phone (07142) 597-0
Fax (07142) 597-19
www.suco.de
e-mail: info@suco.de

DIN EN 175301 – 803 – A
(DIN 43650 – A)

Funktion

Die grüne Leuchtdiode (LED) signalisiert den Schaltzustand des Öffnerkontaktes; die gelbe Leuchtdiode entsprechend für den Schließerkontakt. Vor Erreichen des Schaltpunktes leuchtet die grüne Leuchtdiode. Wird der Schaltpunkt überschritten, schaltet die grüne Leuchtdiode aus und die gelbe Leuchtdiode ein.

Function

The green LED signalizes the behaviour of the N.C.-contact and the yellow LED the behaviour of the N.O.-contact. In the rest position (no pressure) the Green LED illuminates. When the switch point is reached the green LED turns off and the yellow LED illuminates.

Technische Daten

	1-1-84-652-010	1-1-84-652-011
Betriebsspannung:	230 V AC/DC ± 20%	24 V AC/DC ± 20%
Bemessungsstrom:	4 A	
Anschlussquerschnitt (Anschluss mit Adern-endhülsen):	bis 1,5 mm² (AWG 16)	
Isolierklasse:	C – VDE 0110	
Kabelverschraubung:	Pg 11	
Klemmbereich:	6 – 11 mm	
Werkstoffe:		
Gehäuse:	transparente Polyamide	
Isolierkörper:	PA + GF 30	
Gabelkontakt:	CuZn (Ag)	

Technical data

	1-1-84-652-010	1-1-84-652-011
Rated operating voltage:	230 V AC/DC ± 20%	24 V AC/DC ± 20%
Rated operating current:	4 A	
lead-cross section (with wire-end sleeve):	maximum 1,5 mm² (AWG 16)	
Insulation class:	C – VDE 0110	
cable screw coupling:	Pg 11	
cable size:	6 – 11 mm	
Materials:		
Housing:	translucent polyamide	
Terminal board:	PA + GF 30	
Contacts:	CuZn (Ag)	

Schaltbild

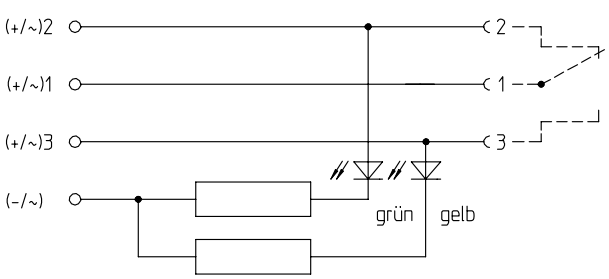

circuit diagram